



CABLE TIE

PRODUCT SELECTION GUIDE

选型手册

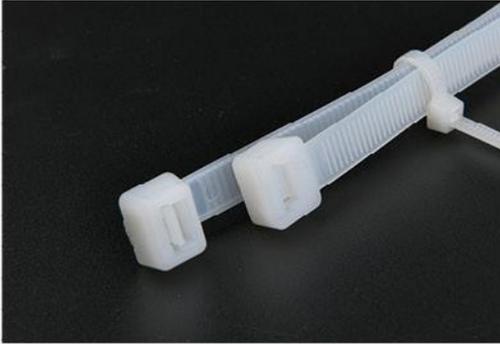

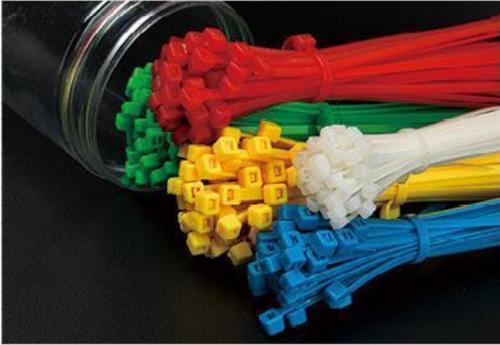

技术信息

- 产品材料：尼龙 66
- 温度范围：-40°C ~85°C
- 产品颜色：本色或者黑色
- 防火等级：UL94V-2
- 其他特性：无卤，抗紫外线

Technical Information

- Material: Nylon 66
- Working Temp: -40°C ~85°C
- Color: Natural or Black
- Flammability: UL94V-2
- Other properties: Halogen-free, UV-resistant

产品特性

- 用途广，使用方法简单；
- 一体式结构可以提供稳定的产品性能；
- 扎带末端设计成易入式，提高了安装效率；
- 备有多种材料和颜色，配合任何准备和环境；
- 适合条件：户内或室内。

Product Feature


- Versatility and simple method of use;
- One-piece structure can provide stable product performance;
- The end of the cable tie is designed to be easy to enter, which improves the installation efficiency;
- Available in a variety of materials and colors to suit any preparation and environment;
- Suitable conditions: indoor or indoor.

特殊材质要求

- 燃烧等级可达到 UL94V-0；
- 抗 UV 材质，建议在室外使用；
- 高温热稳定性（达到 105°C），适用于高温环境；
- 阻燃材质，适用于公共交通现，隧道等。

Special requirements material

- The combustion level can reach UL94V-0;
- Anti-UV material, recommended for outdoor use;
- High temperature thermal stability (up to 105°C), suitable for high temperature environment;
- Flame retardant material, suitable for public transportation, tunnels, etc.

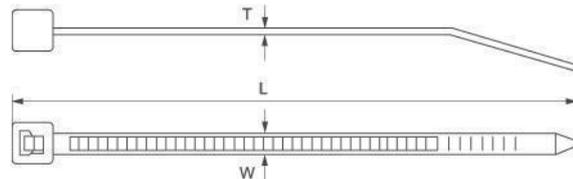

型号规格 Item NO.	宽度 Width		长度 Length		厚度 Thickness		最大捆绑直径 Max.Bundle Dia.		最小捆绑直径 Min.Bundle Dia.		最小拉力 Min.Tensile Strenght		包装条数 Packing article number
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	N	Kg	
3×60	2.5	0.098	60	2.36	1.00	0.039	11	0.43	2.0	0.079	80	8	
3×80			80	3.15	1.00	0.039	16	0.63	2.0	0.079			
3×100			100	3.94	1.00	0.039	22	0.87	2.0	0.079			
3×120			120	4.72	1.00	0.039	30	1.18	2.0	0.079			
3×150			150	5.91	1.00	0.039	35	1.38	2.0	0.079			
3×200			200	7.87	1.00	0.039	50	1.97	2.0	0.079			

型号规格 Item NO.	宽度 Mlth		长度 Length		厚度 Thickness		最大捆绑直径 Max.Bundle Dia.		最小捆绑直径 Min.Bundle Dia.		最小拉力 Min.Tensile Strenght		包装条数 Packing article number
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	N	Kg	
4 × 100	3.6	0.142	100	3.94	1.20	0.047	22	0.87	3.0	0.118	180	18.4	
4 × 120			120	4.72	1.20	0.047	33	1.30	3.0	0.118			
4 × 150			150	5.91	1.30	0.051	35	1.38	3.0	0.118			
4 × 180			180	7.09	1.30	0.051	42	1.65	3.0	0.118			
4 × 200			200	7.87	1.30	0.051	50	1.97	3.0	0.118			
4 × 250			250	9.84	1.30	0.051	65	2.56	3.0	0.118			
4 × 280			280	11.02	1.30	0.051	70	2.76	3.0	0.118			
4 × 300			300	11.81	1.30	0.051	80	3.15	3.0	0.118			
4 × 350			350	13.78	1.30	0.051	100	3.94	3.0	0.118			
4 × 370			370	14.57	1.30	0.051	105	4.13	3.0	0.118			
4 × 400			400	15.75	1.30	0.051	117	4.6	3.0	0.118			
4 × 450			450	17.72	1.30	0.051	133	5.2	3.0	0.118			
4 × 500			500	19.69	1.20	0.047	148	5.8	3.0	0.118			
5 × 100			4.8	0.189	100	3.94	1.30	0.051	30	1.18			
5 × 120	120	4.72			1.30	0.051	30	1.18	3.5	0.138			
5 × 150	150	5.91			1.30	0.051	40	1.57	3.5	0.138			
5 × 180	180	7.09			1.30	0.051	42	1.65	3.5	0.138			
5 × 200	200	7.87			1.30	0.051	50	1.97	3.5	0.138			
5 × 250	250	9.84			1.30	0.051	65	2.55	3.5	0.138			
5 × 280	280	11.02			1.30	0.051	70	2.76	3.5	0.138			
5 × 300	300	11.81			1.30	0.051	80	3.15	3.5	0.138			
5 × 350	350	13.78			1.30	0.051	90	3.54	3.5	0.138			
5 × 380	380	14.96			1.30	0.051	102	4.02	3.5	0.138			
5 × 400	400	15.75			1.30	0.051	105	4.13	3.5	0.138			
5 × 430	430	16.93			1.30	0.051	120	4.72	3.5	0.138			
5 × 450	450	17.72			1.30	0.051	130	5.12	3.5	0.138			
5 × 500	500	19.69			1.30	0.051	150	5.91	3.5	0.138			
5 × 550	550	21.65			1.30	0.051	162	6.3	3.5	0.138			
5 × 600	600	23.62			1.30	0.051	178	7	3.5	0.138			
5 × 650	650	25.59			1.30	0.051	194	7.6	3.5	0.138			
5 × 700	700	27.56			1.30	0.051	207	8.1	3.5	0.138			

型号规格 Item NO.	宽度 Width		长度 Length		厚度 Thickness		最大捆绑直径 Max.Bundle Dia.		最小捆绑直径 Min.Bundle Dia.		最小拉力 Min.Tensile Strenght		包装条数 Packing article number
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	N	Kg	
8 × 150	7.6	0.299	150	5.91	1.40	0.055	41	1.6	8.0	0.315	560	57.1	
8 × 200			200	7.87	1.40	0.055	54	2.12	8.0	0.315			
8 × 250			250	9.84	1.40	0.055	65	2.56	8.0	0.315			
8 × 300			300	11.81	1.40	0.055	80	3.15	8.0	0.315			
8 × 350			350	13.78	1.40	0.055	90	3.54	8.0	0.315			
8 × 380			380	14.96	1.40	0.055	100	3.94	8.0	0.315			
8 × 400			400	15.75	1.40	0.055	105	4.13	8.0	0.315			
8 × 450			450	17.72	1.40	0.055	110	4.33	8.0	0.315			
8 × 500			500	19.69	1.40	0.055	150	5.91	8.0	0.315			
8 × 550			550	21.65	1.40	0.055	165	6.50	8.0	0.315			
10 × 350			9	0.354	350	13.78	1.50	0.059	98	3.8			
10 × 400	400	15.75			1.50	0.059	105	4.13	10.0	0.394			
10 × 450	450	17.72			1.50	0.059	118	4.65	10.0	0.394			
10 × 500	500	19.69			1.50	0.059	150	5.91	10.0	0.394			
10 × 550	550	21.65			1.50	0.059	160	6.30	10.0	0.394			
10 × 600	600	23.62			1.50	0.059	170	6.69	10.0	0.394			
10 × 650	650	25.59			1.50	0.059	185	7.28	10.0	0.394			
10 × 720	720	28.35			1.50	0.059	190	7.48	10.0	0.394			
10 × 760	760	29.92			1.50	0.059	200	7.87	10.0	0.394			
10 × 800	800	31.50			1.50	0.059	205	8.07	10.0	0.394			
10 × 850	850	33.46			1.50	0.059	230	9.06	10.0	0.394			
10 × 900	900	35.43			1.50	0.059	240	9.45	10.0	0.394			
10 × 1000	1000	39.37			1.50	0.059	265	10.43	10.0	0.394			
10 × 1100	1100	43.31			1.50	0.059	300	11.81	10.0	0.394			
10 × 1200	1200	47.24			1.50	0.059	335	13.19	10.0	0.394			
10 × 1500	1500	59.06			1.50	0.059	370	14.57	10.0	0.394			
12 × 300	12	0.47	300	11.81	2.00	0.079	80	3.15	12.0	0.47	900	91.8	
12 × 600			600	23.62	2.00	0.079	170	6.7	12.0	0.47			
12 × 650			650	25.59	2.00	0.079	185	7.2	12.0	0.47			
12 × 720			720	28.35	2.00	0.079	190	7.4	12.0	0.47			
12 × 760			760	29.92	2.00	0.079	200	7.8	12.0	0.47			
12 × 900			900	35.43	2.00	0.079	240	9.4	12.0	0.47			



技术信息

- 产品材料：尼龙 66
- 温度范围：-40°C ~85°C
- 产品颜色：本色或者黑色
- 防火等级：UL94V-2
- 其他特性：无卤，抗紫外线

Technica Information


- Material: Nylon 66
- Working Temp: -40°C ~85°C
- Color: Natural or Black
- Flammability: UL94V-2
- Other properties: Halogen-free, UV resistant

产品特性

- 可退式结构可以使扎带被二次利用；
- 一体式的产品结构可以保证使用特性及稳定性；
- 扎带末端设计成易入式，提高了安装效率；
- 多种材料可供选择；
- 室内和室外使用。

Product Feature

- The retractable structure allows the cable tie to be reused;
- The integrated product structure can ensure the use characteristics and stability;
- The end of the cable tie is designed to be easy to enter, which improves the installation efficiency;
- A variety of materials to choose from;
- Indoor and outdoor use.

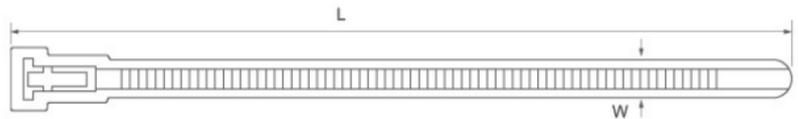

型号规格 Item NO.	宽度 Width		长度 Length		厚度 Thickness		最大捆绑直径 Max Bundle Dia.		最小拉力 Min.Tensile Strenght	
	mm	inch	mm	inch	mm	Inch	mm	inch	N	Kg
4 × 150	3.6	0.142	150	5.91	1.2	0.047	35	1.3	90	9.2
5 × 150	4.8	0.189	150	5.91	1.3	0.051	35	1.3	130	13.3
5 × 200			200	7.87			50	1.9		
5 × 300			350	11.81			82	3.2		
8 × 150	7.6	0.299	150	5.91	1.9	0.075	35	1.38	220	22.4
8 × 200			200	7.87			50	1.97		
8 × 250			250	9.84			66	2.60		
8 × 300			300	11.81			82	3.23		
8 × 350			350	13.78			109.9	4.33		
8 × 400			400	15.75			105	4.1		
8 × 450			450	17.72			118	4.6		
8 × 600			600	23.62			170	6.7		




技术信息

- 产品材料：采用优质不锈钢 304、316，各种长度皆可生产，特殊规格按客户供样制作。
- 产品特性：耐酸、耐腐蚀、抗张强度高、使用简单、快捷等优势。
- 工作温度：-60℃ ~150℃

Technical Information

- Product material: 304, 316 stainless steel, all kinds of length can be produced, special specifications according to customer sample production.
- Product characteristics: acid resistance, corrosion resistance, high tensile strength, easy to use, fast and other advantages.
- Operating temperature: -60℃ ~150℃

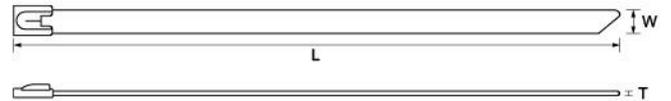

型号规格 Item NO.	厚度 (T) Thickness		宽度 (W) Width		长度 (L) Length		最大捆绑直径 Max.Bundle Dia.		拉力 Min Strength		包装条数 Packing article number
	mm	inch	mm	inch	mm	inch	mm	inch	N	Kg	
4.6 × 100	0.25	0.01	4.6	0.18	100	3.94	24	0.94	600	61	100
4.6 × 150					150	5.91	37	1.46			
4.6 × 200					200	7.87	50	1.97			
4.6 × 250					250	9.84	63	2.48			
4.6 × 300					300	11.81	76	2.99			
4.6 × 350					350	13.78	89	3.50			
4.6 × 400					400	15.75	102	4.02			
4.6 × 500					500	19.69	130	5.12			
8 × 150	0.25	0.01	8	0.31	150	5.91	37	1.46	800	82	100
8 × 200					200	7.87	50	1.97			
8 × 250					250	9.84	63	2.48			
8 × 300					300	11.81	76	2.99			
8 × 350					350	13.78	89	3.50			
8 × 400					400	15.75	102	4.02			
8 × 500	500	19.69	130	5.12							
10 × 200	0.25	0.01	10	0.39	200	7.87	50	1.97	1000	102	100
10 × 300					300	11.81	76	2.99			
10 × 400					400	15.75	102	4.02			
10 × 500					500	19.69	130	5.12			
12 × 500	0.25	0.01	12	0.47	500	19.69	130	5.12	1200	122	100
12 × 600					600	23.62	160	6.30			
12 × 700					700	27.56	190	7.48			
12 × 800					800	31.50	220	8.66			
16 × 800	0.25	0.01	16	0.63	800	31.50	220	8.66	1600	163	50
16 × 900					900	35.43	250	9.84			
16 × 1000					1000	39.37	280	11.02			
19 × 1000	0.25	0.01	19	0.75	1000	39.37	280	11.02	2000	204	50
19 × 1100					1100	43.31	310	12.20			
19 × 1200					1200	47.24	340	13.39			



技术信息

- 产品材料：采用优质不锈钢 304、316，各种长度皆可生产，特殊规格按客户供样制作。
- 产品特性：耐酸、耐腐蚀、抗张强度高、使用简单、快捷等优势。
- 工作温度：-60℃ ~150℃

Technical Information

- ▶ Product material: 304, 316 stainless steel, all kinds of length can be produced, special specifications according to customer sample production.
- ▶ Product characteristics: acid resistance, corrosion resistance, high tensile strength, easy to use, fast and other advantages.
- Operating temperature: -60℃ ~150℃

型号规格 Item NO.	厚度 Thickness		宽度 Width		长度 Length		最大捆绑直径 Max.Bundle Dia.		拉力 Min Strenght		包装条数 Packing article number
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	N	Kg	
12.7 × 300	0.5	0.02	12.7	0.5	300	11.81	76	2.99	1300	133	100
12.7 × 400					400	15.75	102	4.02			
12.7 × 500					500	19.69	130	5.12			
16 × 300	0.4	0.01	16	0.63	300	11.81	50	1.97	1500	153	50
16 × 400	0.5	0.02			400	15.75	76	2.99			
16 × 500	0.76	0.03			500	19.69	102	4.02			
19 × 800	0.4	0.02	19	0.75	800	31.50	230	9.06	1800	184	50
19 × 1000	0.5				1000	39.37	280	11.02			
19 × 1200	0.76				1200	47.24	350	13.78			



技术信息

- 产品材料：采用优质不锈钢 304、316，各种长度皆可生产，特殊规格按客户供样制作。
- 产品特性：耐酸、耐腐蚀、抗张强度高、使用简单、快捷等优势。
- 工作温度：-60℃ ~150℃

Technical information

- ▶ Product material: 304, 316 stainless steel, all kinds of length can be produced, special specifications according to customer sample production.
- ▶ Product characteristics: acid resistance, corrosion resistance, high tensile strength, easy to use, fast and other advantages.
- Operating temperature: -60℃ ~150℃

型号规格 Item NO.	厚度 Thickness		宽度 Width		长度 Length		最大捆绑直径 Max.Bundle Dia.		拉力 Min Strenght		包装条数 Packing article number
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	N	Kg	
4.6 × 300	0.5	0.02	6.4	0.25	300	11.81	76	2.99	800	82	100
4.6 × 400					300	11.81	76	2.99			
4.6 × 500					300	11.81	76	2.99			
9.5 × 300	0.5	0.02	9.5	0.37	300	11.81	76	2.99	1000	102	100
9.5 × 400					300	11.81	76	2.99			
9.5 × 500					300	11.81	76	2.99			
12.7 × 300	0.5	0.02	12.7	0.63	300	11.81	76	2.99	1300	133	100
12.7 × 400	0.76	0.03			400	15.75	102	4.02			
12.7 × 500					500	19.69	130	5.12			
16 × 300	0.5	0.02	16	0.63	200	7.87	50	1.97	1500	153	50
16 × 400	0.76	0.03			300	11.81	76	2.99			
16 × 500					400	15.75	102	4.02			
19 × 800	0.5	0.02	19	0.75	800	31.5	230	9.06	1800	184	50
19 × 1000	0.76	0.03			1000	39.37	280	11.02			
19 × 1200					1200	47.24	350	13.78			



技术信息

- 产品材料：采用优质不锈钢 304、316，耐腐蚀多重锁紧扎带，抗张力可达到 250 磅，室内外适用，适用于通讯、电力、造船及输油管道工程上应用。
- 工作温度：-60°C ~ 150°C

Technical Information

- Material: stainless steel 304, 316, corrosion resistant multiple locking belt, tensile strength up to 250 pounds, suitable for indoor and outdoor, suitable for communication, electric power, shipbuilding and oil pipeline applications.
- Operating temperature: -60°C ~ 150°C

型号规格 Item NO.	宽度 Width		长度 Length		最大捆绑直径 Max.Bundle Dia.		拉力 Min Strength		包装条数 Packing article number
	mm	inch	mm	inch	mm	inch	N	Kg	
7 × 150	7	0.276	150	37	37	1.46	1120	114	100
7 × 225			225	60	60	2.36			
7 × 300			300	76	76	2.99			
7 × 335			335	85	85	3.35			
7 × 400			400	102	102	4.02			
7 × 500			500	130	130	5.12			
12 × 150	12	0.47	150	37	37	1.46	1500	153	100
12 × 225			225	60	60	2.36			
12 × 300			300	76	76	2.99			
12 × 335			335	85	85	3.35			
12 × 400			400	102	102	4.02			
12 × 500			500	130	130	5.12			



技术信息

- 产品材料：采用优质不锈钢 304、316，外喷环氧树脂热固性粉末涂料，各种长度皆可生产，接受合理的 OEM。
- 产品特性：耐酸、耐腐蚀、不易燃烧、抗张强度高，滚珠式结构的 XR-C1 型扎带，具有简单、快捷、不可解开等安装上等优势，
- 工作温度：-60℃ ~150℃

Technical Information

- Material: high quality stainless steel 304, 316, spray epoxy thermosetting powder coating, all kinds of length can be produced, accept reasonable OEM.
- Product characteristics: acid resistance, corrosion resistance, not easy to burn, high tensile strength, ball structure XR-C1 type tie, with simple, fast, can not be untied and other first-class advantages in installation.
- Operating temperature: -60℃ ~150℃

型号规格 Item NO.	厚度 Thickness		宽度 Width		长度 Length		最大捆绑直径 Max.Bundle Dia.		拉力 Min Strength		包装条数 Packing article number
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	N	Kg	
4.6 × 150	0.25	0.01	4.6	0.18	150	5.91	37	1.46	600	61	100
4.6 × 200					200	7.87	50	1.97			
4.6 × 250					250	9.84	63	2.48			
4.6 × 300					300	11.81	76	2.99			
4.6 × 350					350	13.78	89	3.50			
4.6 × 400					400	15.75	102	4.02			
4.6 × 500					500	19.69	130	5.12			
8 × 200	0.25	0.01	8	0.31	200	7.87	50	1.97	800	82	100
8 × 250					250	9.84	63	2.48			
8 × 300					300	11.81	76	2.99			
8 × 350					350	13.78	89	3.50			
8 × 400					400	15.75	102	4.02			
8 × 500					500	19.69	130	5.12			
10 × 300	0.25	0.01	10	0.39	300	11.81	76	2.99	1000	102	100
10 × 400					400	15.75	102	4.02			
10 × 500					500	19.69	130	5.12			
12 × 600	0.25	0.01	12	0.47	600	23.62	160	6.30	1200	122	100
12 × 700					700	27.56	190	7.48			
12 × 800					800	31.50	220	8.66			




技术信息

- 产品特性：适用于网络线、讯号线、电源线之束绑，避免使用传统尼龙扎带时，因过紧而影响传输速度，可重复使用。

Technical Information

- Product features: suitable for network cable, signal cable, power cord binding, avoid the use of traditional nylon tie tape, due to too tight will affect the transmission speed, can be reused.

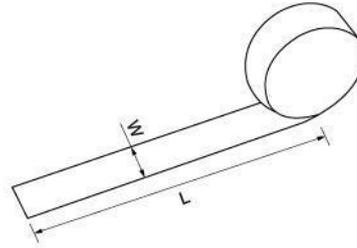

型号规格 Item NO.	长度 (L) Length		宽度 (W) Width		颜色 Color	包装条数 Packing article number
	mm	inch	mm	inch		
8×1000	1000	39.37	8	0.31	黑、白、红、黄 蓝、绿、灰	
8×2000	2000	78.74				
8×3000	3000	118.11				
8×5000	5000	196.85				
8×6000	6000	236.22				
8×10000	10000	393.70				
10×1000	1000	39.37	10	0.39		
10×2000	2000	78.74				
10×3000	3000	118.11				
10×5000	5000	196.85				
10×6000	6000	236.22				
10×10000	10000	393.70				
15×1000	1000	39.37	15	0.59		
15×2000	2000	78.74				
15×3000	3000	118.11				
15×5000	5000	196.85				
15×6000	6000	236.22				
15×10000	10000	393.70				
20×1000	1000	39.37	20	0.78		
20×2000	2000	78.74				
20×3000	3000	118.11				
20×5000	5000	196.85				
20×6000	6000	236.22				




技术信息

- 产品特性：适用于网络线、讯号线、电源线之束绑，避免使用传统尼龙扎带时，因过紧而影响传输速度，可重复使用。

Technical Information

- Product features: suitable for network cable, signal cable, power cord binding, avoid the use of traditional nylon tie tape, due to too tight will affect the transmission speed, can be reused.

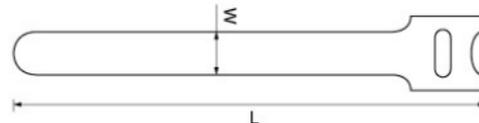

型号规格 Item NO.	长度 (L) Length		宽度 (W) Width		颜色 Color	包装条数 Packing article number
	mm	inch	mm	inch		
12 × 100	100	3.94	12	0.47	黑、白、红、黄 蓝、绿、灰	
12 × 125	125	4.92				
12 × 150	150	5.91				
12 × 200	200	7.87				
12 × 250	250	9.84				
12 × 300	300	11.81				




技术信息

- 产品特性：睿诚不锈钢扎带盘带，配合不锈钢扎扣及专用扎带紧带机紧固，是一种新型高效绑扎方法。可按客户需要刻印标志，任意长度皆可制作。

Technical Information

- Product features: Ruicheng stainless steel tie belt tape, with stainless steel tie buckle and special tie belt tightening machine fastening, is a new efficient binding method. Marks can be engraved according to customer needs, any length can be produced.

型号规格 Item NO.	宽度 Width	厚度 Thickness	包装米数 (m) Packing article number
	mm	mm	
RC-4.6	4.6	0.25	
RC-6.4	6.4	0.4/0.5	
RC-7.9	7.9	0.25	
RC-9.5	9.5	0.5	
RC-10	10	0.25	
RC-12	12	0.25/0.4/0.5	
RC-12.7	12.7	0.5/0.76	
RC-16	16	0.25/0.5/0.76	
RC-19	19	0.4/0.5/0.7/0.76	
RC-21	21	1	
RC-23	23	0.5	


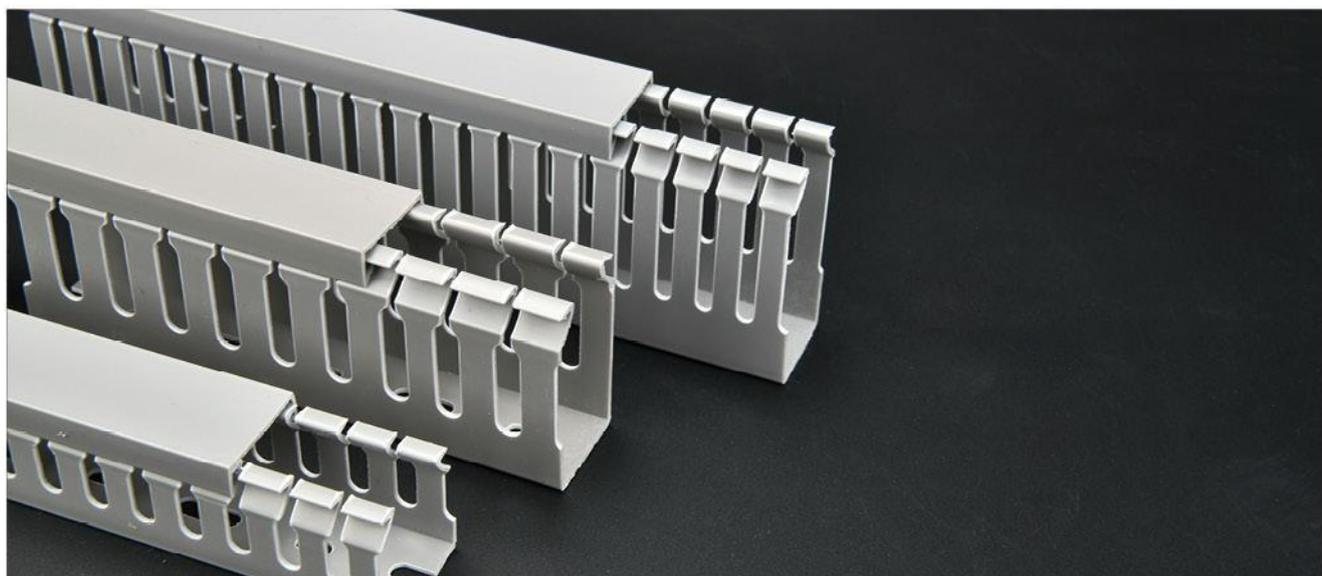


技术信息

- 产品材质：采用 PVC 塑料制造，具有绝缘、防弧、阻燃自熄灯特点。
- 产品构造：由槽底及槽盖组成，设有出线孔，底部打孔。
- 产品长度：标准长度为 2 米，可提供长度定制服务。

Technical Information

- Material: made of PVC plastic, with insulation, arc - proof, flame - retardant characteristics of self - extinguishing.
- Structure: it is composed of groove bottom and groove cover, with outlet hole and bottom hole.
- Length: the standard length is 2 meters, can provide length customization service.




型号规格 Item NO.	宽度 Width		高度 Highly		包装条数 Packing article number
	mm	inch	mm	inch	
25 × 25	25	0.98	25	0.98	
30 × 25	30	1.18	25	0.98	
30 × 30			30	1.18	
30 × 35			35	1.38	
35 × 35	35	1.38	35	1.38	
40 × 25	40	1.57	25	0.98	
40 × 30			30	1.18	
40 × 40			40	1.57	
45 × 45	45	1.77	45	1.77	
50 × 25	50	1.97	25	0.98	
50 × 30			30	1.18	
50 × 35			35	1.38	
50 × 40			40	1.57	
50 × 45			45	1.77	
50 × 50			50	1.97	
50 × 55			55	2.17	
50 × 80			80	3.15	
50 × 100			100	3.94	

型号规格 Item NO.	宽度 Width		高度 Highly		包装条数 Packing article number
	mm	inch	mm	inch	
60 × 25	60	2.36	25	0.98	
60 × 35			35	1.38	
60 × 40			40	1.57	
60 × 45			45	1.77	
60 × 50			50	1.97	
60 × 60			60	2.36	
60 × 100			100	3.94	
65 × 25	65	2.56	25	0.98	
65 × 33			33	1.30	
65 × 45			45	1.77	
65 × 65			65	2.56	
80 × 35	80	3.15	35	1.38	
80 × 40			40	1.57	
80 × 50			50	1.97	
80 × 60			60	2.36	
80 × 80			80	3.15	
80 × 100			100	3.94	
100 × 100			100	3.94	100



技术信息

- 优质 PE 原料，精工制作而成；
- 独特的膨胀曲线设计，锚固力更强；
- 翅型叶片防止锚栓在墙体内跟转；
- 加大的边缘防止锚栓穿入墙体；
- 配合优质螺钉，使得膨胀管膨胀效果更好，

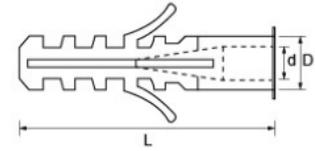

Technical Information

- High quality PE raw materials, seiko made from;
- Unique expansion curve design, stronger anchoring force;
- The wing blade prevents the anchor bolt from turning in the wall.
- The enlarged edge prevents the anchor bolt from penetrating the wall;
- With high quality screw, the expansion tube expansion effect is better.

型号规格 Item NO.	L (mm)	D (mm)	d (mm)	Screw (mm)	包装条数 Packing article number
5 × 25	25	5.0	3.5	Φ3.0 × 25	
6 × 30	30	6.0	4.8	Φ4.0 × 30	
7 × 35	35	7.0	5.3	Φ4.0 × 35	
8 × 40	40	8.0	5.8	Φ4.0 × 40	
10 × 50	50	10.0	8.3	Φ4.0 × 50	
12 × 60	60	12.0	10.0	Φ6.0 × 60	




技术信息

- 敲击式锚栓，配合雨伞牙螺钉；
- 敲击螺钉时膨胀管膨胀区胀开，并紧压墙壁达到锚固的作用。
- 敲击式安装，施工更简单，节约施工时间；

Technical Information

- Percussive anchor bolt with umbrella tooth screw;
- The expansion area of the expansion pipe expands when the screw is struck, and the well wall is tightly pressed to achieve the role of anchorage.
- Percussive installation, simpler construction, saving construction time;



型号规格 Item NO.	锚栓尺寸 D × L (mm) Anchor Size	螺丝尺寸 d × L (mm) NAIL SIZE	DRILLA DIA (mm)	PRACTOCAL 1AX (mm)
HF0530	5 × 30	3.5 × 30	5	5
HF0535	5 × 35	3.5 × 35		10
HF0540	5 × 40	3.5 × 40		15
HF0545	5 × 45	3.5 × 45		20
HF0550	5 × 50	3.5 × 50		25
HF0635	6 × 35	4.0 × 35	6	6
HF0640	6 × 40	4.0 × 40		10
HF0650	6 × 50	4.0 × 50		15
HF0660	6 × 60	4.0 × 60		30
HF0670	6 × 70	4.0 × 70		40
HF0680	6 × 80	4.0 × 80	8	50
HF0850	8 × 50	5.0 × 50		15
HF0860	8 × 60	5.0 × 60		20
HF0880	8 × 80	5.0 × 80		40
HF08100	8 × 100	5.0 × 100		60
HF08115	8 × 115	5.0 × 115	10	60
HF08135	8 × 135	5.0 × 135		90
HF1080	10 × 80	7.0 × 80		40
HF10100	10 × 100	7.0 × 100		50
HF10120	10 × 120	7.0 × 120		80
HF10140	10 × 140	7.0 × 140	10	90
HF10160	10 × 160	7.0 × 160		110





技术信息


- 产品材质: 采用PE料注射成型, 弹性大, 耐冲击, 绝不破裂。该系列机卡上, 可大量省工时, 降低成本。

Technical Information

- Product material: PE material injection molding, elasticity, impact resistance, never rupture. This series of machine CARDS can save a lot of time and reduce the cost.



型号规格 Item NO.	尺寸 Size (mm)			钢钉 Nail	包装 Packing
	H	H1	V		
4MM	6.0	3.8	4.0	1.7 × 15	
5MM	6.0	3.8	5.0	1.7 × 15	
6MM	6.5	4.1	6.0	1.7 × 17	
7MM	7.0	4.7	7.0	1.9 × 18	
8MM	7.5	5.0	8.0	2.05 × 19	
9MM	8.2	5.4	9.0	2.05 × 19	
10MM	8.6	5.7	10.0	2.32 × 23	
12MM	9.0	6.1	12.0	2.32 × 25	
14MM	11.0	8.0	14.0	2.32 × 25	
16MM	16.9	14	16.0	2.5 × 35	
22MM	25	23	22.0	2.5 × 48	
25MM	27.7	25	25.0	3.2 × 48	

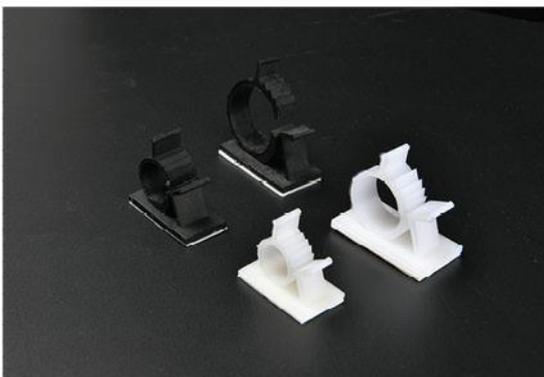


技术信息


- 产品材质: UL 合格之 NYLON66 (黑色), 防火等级 94V-2, 底座背胶。
- 产品特点: 1. 一种规格的 AP 型可调试固定座, 即可适合多种规格的电线适用, 大量降低库存压力; 2. 装配简单、快速、牢固, 开启容易, 可多次重复使用。

Technical Information

- Material: UL qualified NYLON66 (black), fire rating 94V-2, base back glue.
- Product features: 1. One kind of AP type adjustable fixed seat can be suitable for various specifications of the wire, greatly reducing the stock pressure; 2. The assembly is simple, fast, firm, easy to open, and can be reused many times.

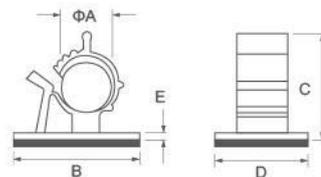

型号规格 Item NO.	尺寸 Size (mm)					
	A	B	C	D	E	F
TAP-0810	7.9~10.3	25.4	22.2	19.1	1.6	10.2
TAP-1013	10.0~12.5	31.8	27.8	19.1	1.6	10.2
TAP-1316	12.6~15.4	37.0	31.8	18.4	3.0	12.1
TAP-1720	16.5~20.1	42.0	37.0	25.0	3.0	12.7
TAP-2225	22.2~25.4	41.8	43.5	21.5	3.0	11.3

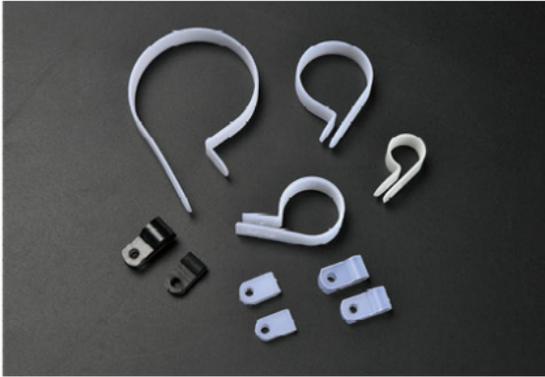


技术信息

- 产品材质：UL 合格之 NYLON66（本色），防火等级 94V-2；
- 产品用法：将电缆套入钮环中（如附图），再议螺丝固定；
- 产品用途：电机、电子、冷气配线之固定用。

Technical Information

- Material: UL qualified NYLON66 (natural color), fire rating 94V-2;
- Product usage: put the cable into the button ring (as shown in the picture), then fix the screw;
- Purpose: Fixing electrical, electronic and air-conditioner wiring.

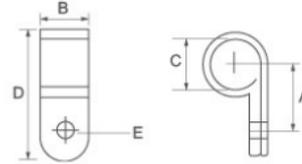

型号规格 Item NO.	尺寸 Size (mm)				
	A	B	C	D	E
RC-3.3U	9.5	9.6	3.3	17	4.0
RC-5.2U	10.5	9.6	5.2	18.5	4.0
RC-5.3U	10.5	9.6	5.3	18.5	4.0
RC-6.4	12	9.6	6.35	21	4.0
RC-8.4	12.5	9.6	8.35	22.8	4.0
RC-10.4	13.5	9.6	10.35	23.8	4.0
RC-13.2	13.5	9.6	12.7	25.8	4.0
RC-16	16.5	9.6	15.8	30.5	4.0
RC-19	17	12	19	35.5	4.0
RC-23	26	13	23	44	4.0
RC-30	23	12.7	30	47	4.0
RC-50	41	12.5	50	77	4.0



技术信息

- 产品名称：R 型理线夹
- 产品材质：尼龙 PA66
- 温度范围：-40℃ ~+150℃
- 产品颜色：白色、黑色
- 防火等级：94V-2
- 其他特征：绝缘、耐磨

Technical Information

- Product name: R type cable management clamp
- Product material: nylon PA66
- Temperature range: - 40 °C ~+150 °C
- Product color: white, black
- Fire rating: 94V-2
- Other features: insulation, abrasion resistance

产品特性

1. 电线固定牢固，不占空间
 2. 装配简单、快速、牢固、抗冻耐用、绝缘质轻、可多次重复使用
 3. 帮助理线，收纳电线电缆
 4. 经得起环境考验，耐高温、耐候性中的佼佼者
- 适合条件：室内或者室外

Product features


1. The wires are firmly fixed and do not occupy space
 2. Simple, fast, firm, frost resistant, durable, light insulation, and reusable
 3. Help manage wires and cables
 4. It can stand the environmental test and is the best in high temperature and weather resistance
- Suitable conditions: indoor or outdoor

产品使用方法

1. 线夹穿过线缆
2. 将螺丝放进扭环中
3. 用螺丝刀拧紧
4. 安装完成

How to use the product

1. The cable clamp passes through the cable
2. Put the screw into the torsion ring
3. Tighten with screwdriver
4. Installation completed

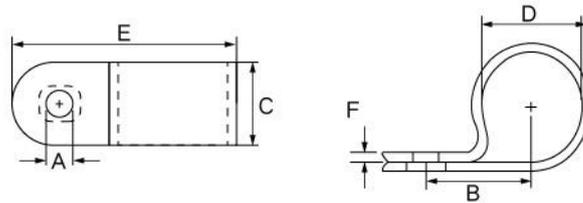

型号 Item No.		螺丝孔 Screw hole A	B	C	束线径 D	E	厚度 F	包装 只 / 包 Package
国际规格	国内规格							
UC-0	3.2(1/8")	4.9	7.9	9.4	3.2(1/8")	17	1.36	1000
UC-0.5	4.8(3/16")	4.9	10	9.6	4.8(3/16")	18.51	1.15	1000
UC-1	6.35(1/4")	4.93	10	10.11	6.35(1/4")	19.62	1.23	1000
UC-1.5	7.9(5/16")	5.1	10.1	10	7.9(5/16")	22.38	1.13	1000
UC-2	9.5(3/8")	5.1	12.4	12	9.5(3/8")	23.64	1.24	500
UC-3	12.7(1/2")	5.1	15	12	12.7(1/2")	30.4	1.31	500
UC-4	15.8(5/8")	5.1	15.2	12	15.8(5/8")	32.6	1.35	500
UC-5	19.4(3/4")	5.1	20	12	19.4(3/4")	37.11	1.33	500
UC-6	25.4(1")	5.1	22	12	25.4(1")	42.2	1.34	100
UC-6.5	27.5(1-1/16")	5	27	12.8	27.5(1-1/16")	50	1.49	100
UC-7	31.8(1-1/4")	5.1	27	11.7	31.8(1-1/4")	50.5	1.7	100
UC-9	36.7(1-1/2")	5.1	32	12	36.7(1-1/2")	56.31	1.7	100



技术信息

- 产品名称: CL 可调式配线固定座
- 产品材质: 尼龙 PA66
- 产品型号: CL 系列
- 温度范围: -40°C ~ +150°C
- 产品颜色: 白色、黑色
- 产品背胶: 3M 胶
- 防火等级: UL94V-2
- 其他特征: 抗紫外线、底座 3M 胶

Technical Information

- Product Name: CL Adjustable Wiring Fixing Seat
- Product material: Nylon PA66
- Product model: CL series
- Temperature range: -40°C ~ +150°C
- Product color: white, black
- Product back glue: 3M glue
- Fire rating: UL94V-2
- Other features: anti-ultraviolet, base 3M glue

产品特性

1. 胶背粘性强拆装快, 电线固定牢固, 不占空间
2. 装配简单、快速、牢固、抗冻耐用、绝缘质轻、可多次重复使用
3. 帮助理线, 收纳电线电缆
- 4.3 种规格型号任意选择

适合条件: 可用于标识机房、电脑等, 等内部连接和电缆线

Product features


1. The adhesive back is strong and easy to disassemble and assemble, and the wires are firmly fixed without taking up space
 2. The assembly is simple, fast, firm, durable against frost, light insulated, and can be reused many times
 3. Help to manage wires and store wires and cables
 - 4.3 kinds of specifications and models are optional
- Suitable conditions: It can be used to identify internal connections and cables in computer rooms, computers, etc.

产品使用方法

1. 用于光滑干净平面 (禁止在水、油蜡、粉尘时不能使用)
2. 保证接触面清洁, 如不清洁则用毛巾将使用表面擦拭干净
3. 撕掉底座保护纸, 用力按压 10 秒以上
4. 尽量不要马上使用, 等粘贴 5-10 分钟后再挂物品能使粘性达到最佳

product instructions

1. For smooth and clean surfaces (cannot be used in water, oil wax, dust)
2. Make sure the contact surface is clean, if it is not clean, wipe the surface with a towel
3. Tear off the protective paper on the base and press hard for more than 10 seconds
4. Try not to use it immediately, wait for 5-10 minutes before hanging the item to make the stickiness reach the best

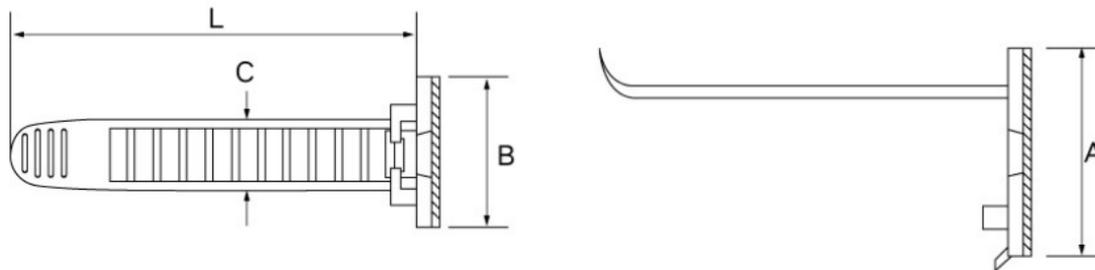

型号规格 Item NO.	A	B	C	L	包装 packing
CL-1/ACT-13	25	18	8	64	100 只
CL-2/ACT-17	25	18	8	92	
CL-3/ACT-22	30	21	12	94	



产品特性

- 1.3M 胶，胶背粘性强拆装快，电线固定牢固，不占空间
- 2. 装配简单、快速、牢固、抗冻耐用、绝缘质轻、可多次重复使用
- 3. 帮助理线，收纳电线电缆
- 适合条件：室内或者户外

Product features


- 1.3M glue, strong adhesive backing, fast disassembly and assembly, fixed wires firmly, does not take up space
- 2. The assembly is simple, fast, firm, durable against frost, light insulated, and can be reused many times
- 3. Help to manage wires and store wires and cables
- Suitable conditions: indoor or outdoor

技术信息

- 产品材质：尼龙新料 PA66
- 温度范围：-40 ° C~+150 ° C
- 产品颜色：黑色、白色
- 防火等级：UL94V-2
- 其他特征：抗紫外线、底座 3M 胶

Technical Information

- Product material: new nylon material PA66
- Temperature range: -40 ° C~+150 ° C
- Product color: black, white
- Fire rating: UL94V-2
- Other features: anti-ultraviolet, base 3M glue

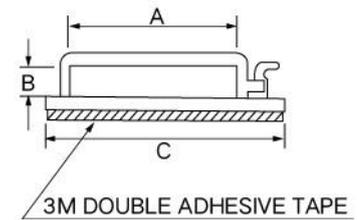


产品使用方法


1. 擦干净需要粘贴的位置
2. 揭掉产品背面的 3M 胶抗蚀膜
3. 将产品胶面粘贴在选定的位置上
4. 固定线缆

How to use the product

1. Wipe the place where it needs to be pasted
2. Peel off the 3M adhesive resist film on the back of the product
3. Paste the product glue surface on the selected position
4. Fix the cable



型号规格 Item NO.	A	B	C	D	E	F	适用扁平电缆	包装 packing
FC-30	32.0	6.2	45.8	19.8	14.9	2.8	30	100PCS
FC-40	39.5	6.2	53.3	19.2	14.8	2.8	40	
FC-50	63.5	6.0	77.5	19.3	14.9	2.8	50	

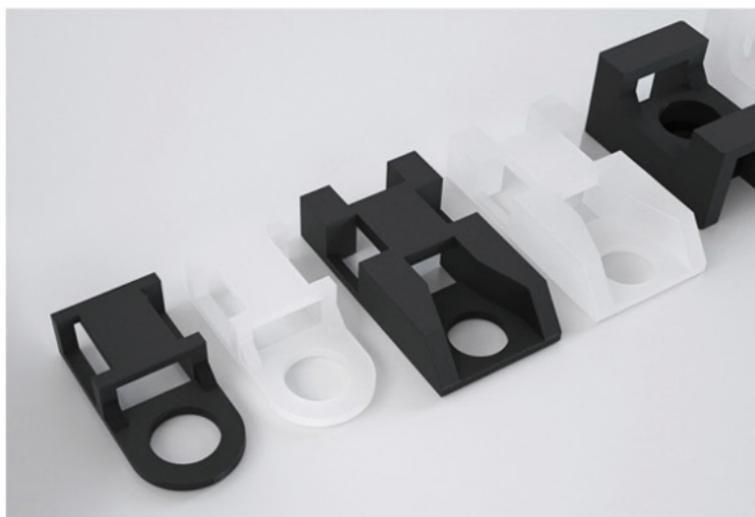

产品用途

- 1. 适用于网吧、机房、办公室等场景，需将电线、电缆固定在基板上之固定用
- 2. 配合螺丝和扎带使用
- 适合条件：室内或者室外

Product use

- 1. It is applicable to Internet cafes, computer rooms, offices and other scenes. It is used to fix wires and cables on the base plate
- 2. Use with screws and ties
- Suitable conditions: Indoor or outdoor

技术信息

- 产品名称：马鞍型扎带固定座
- 产品型号：HC-7、HC-5、HC-4、HC-2、HC-2S、HC-1、HC-1S、HC-01、HC-0
- 产品材质：尼龙 PA66
- 温度范围：-5℃ ~150℃
- 产品颜色：白色、黑色
- 防火等级：V-2 级阻燃材料
- 其他特征：绝缘、耐磨

Technical Information


- Product name: Saddle type binding seat
- Product model: HC-7, HC-5, HC-4, HC-2, HC-2S, HC-1, HC-1S, HC-01, HC-0
- Product material: nylon PA66
- Temperature range: - 5 °C ~150 °C
- Product color: white, black
- Fire rating: V-2 flame retardant material
- Other features: Insulation, abrasion resistance

产品使用方法

1. 将固定座用螺丝固定
2. 将扎带穿进固定座中，把要固定的产品放进去
3. 收缩扎带
4. 安装完成

How to use the product

1. Fix the fixed base with screws
2. Thread the tie into the fixing seat and put the product to be fixed in it
3. Shrink tie
4. Installation completed

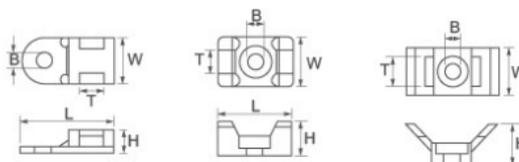

型号 model	H	L	W	内径 Inner bore	颜色 colour
HC-0	5	19.6	9.5	3.7	黑 / 白 Black/White
HC-01	13	24	6	4.6	黑 / 白 Black/White
HC-1	7	15	10	4.1	黑 / 白 Black/White
HC-1S	5.7	12.6	7	3.3	黑 / 白 Black/White
HC-2	10	23	16	6	黑 / 白 Black/White
HC-2S	10	23	16	5	黑 / 白 Black/White
HC-4	12	29	15	5.2	黑 / 白 Black/White
HC-5	10	21.5	16	1.5	黑 / 白 Black/White
HC-7	14	30	16	5	黑 / 白 Black/White




技术信息

- 产品名称: 粘贴式扭线环
- 产品材质: 尼龙 PA66
- 产品型号: KL 系列
- 温度范围: $-40^{\circ}\text{C}\sim+150^{\circ}\text{C}$
- 产品颜色: 白色
- 产品背胶: 3M 胶
- 防火等级: UL94V-2
- 其他特征: 抗紫外线、底座 3M 胶

Technical Information

- Product Name: Sticky Twisted Wire Ring
- Product material: Nylon PA66
- Product model: KL series
- Temperature range: $-40^{\circ}\text{C}\sim+150^{\circ}\text{C}$
- Product color: white
- Product back glue: 3M glue
- Fire rating: UL94V-2
- Other features: anti-ultraviolet, base 3M glue

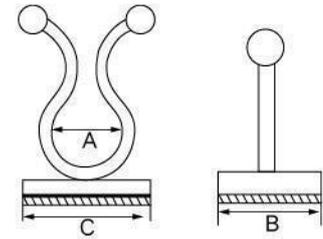

产品特性

- 胶背粘性强拆装快, 电线固定牢固, 不占空间
- 装配简单、快速、牢固、抗冻耐用、绝缘质轻、可多次重复使用
- 帮助理线, 收纳电线电缆
- 五种规格型号任意选择
- 适合条件: 室内或者户外

Product features

- The adhesive back is strong and easy to disassemble and assemble, and the wires are firmly fixed without taking up space
- The assembly is simple, fast, firm, durable against frost, light insulated, and can be reused many times
- Help to manage wires and store wires and cables
- Five specifications and models can be selected at will
- Suitable conditions: indoor or outdoor



产品使用方法

1. 将产品胶面粘贴在选定的位置上
2. 准备好电线和扭线环
3. 扭动两个圆头安装
4. 固定线缆
5. 安装完成

How to use the product

1. Paste the adhesive surface of the product on the selected position
2. Get your wires and twist loops ready
3. Twist the two round heads to install
4. Fix the cable
5. The installation is complete

型号规格 Item NO.	A	B	C	包装 packing
KL-1	15.0	20.0	20.0	100 个 / 包
KL-2	9.0	14.0	20.0	
KL-3	11.5	20.0	20.0	
KL-4	20.0	25.0	25.0	
KL-5	17.0	13.0	25.0	

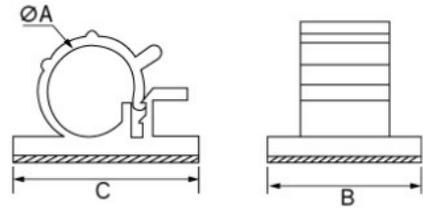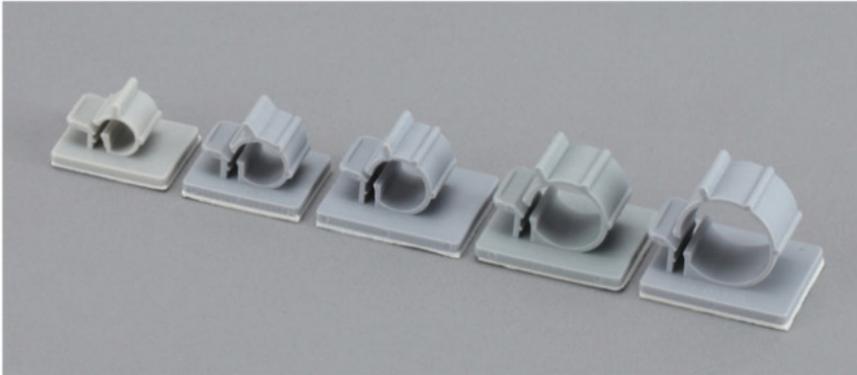

技术信息

- 产品材质: 尼龙新料 PA66
- 温度范围: -40°C ~ +150°C
- 产品颜色: 灰色
- 产品背胶: 3M 胶
- 防火等级: UL94V-2
- 其他特征: 抗紫外线、底座 3M 胶

Technical Information

- Product material: new nylon material PA66
- Temperature range: -40°C ~ +150°C
- Product color: gray
- Product back glue: 3M glue
- Fire rating: UL94V-2
- Other features: anti-ultraviolet, base 3M glue

产品使用方法

1. 擦干净需要粘贴的位置
2. 揭掉产品背面的 3M 胶抗蚀膜
3. 将产品胶面粘贴在选定的位置上
4. 固定线缆

How to use the product

1. Wipe the place where it needs to be pasted
2. Peel off the 3M adhesive resist film on the back of the product
3. Paste the product glue surface on the selected position
4. Fix the cable

产品特性

1. 胶背粘性强拆装快, 电线固定牢固, 不占空间
 2. 装配简单、快速、牢固、抗冻耐用、绝缘质轻、可多次重复使用
 3. 帮助理线, 收纳电线电缆
 4. 多个档位可以调节, 适用不同粗细的线束, 更实用便利, 告别无法匹配与安装的尴尬
- 适合条件: 室内或者户外

Product features

1. The adhesive back is strong and easy to disassemble and assemble, and the wires are firmly fixed without taking up space
 2. The assembly is simple, fast, firm, durable against frost, light insulated, and can be reused many times
 3. Help to manage wires and store wires and cables
 4. Multiple gears can be adjusted, suitable for wire harnesses of different thicknesses, more practical and convenient, and bid farewell to the embarrassment of unable to match and install
- Suitable conditions: indoor or outdoor

型号规格 Item NO.	A	B	C	包装 packing
TS-0607	6~7	20.0	25.0	100PCS
TS-0708	7~8	20.0	25.0	
TS-0910	9~10	24.5	30.5	
TS-1214	12~14	24.5	30.5	
TS-1618	16~18	24.5	30.5	



技术信息

- 产品材质：尼龙 PA66
- 温度范围：-40°C ~+150°C
- 产品颜色：黑色和白色
- 防火等级：UL94V-2
- 其他特征：抗紫外线、底座 3M 胶

Technical Information

- Product material: nylon PA66
- Temperature range: - 40 °C ~+150°C
- Product color: black and white
- Fire rating: UL94V-2
- Other features: UV resistance, 3M adhesive for base

产品特性

1. 胶背粘性强拆装快，电线固定牢固，不占空间
 2. 装配简单、快速、牢固、容易开启，可多次重复使用
- 适合条件：室内或者户外

Product features


1. The adhesive back is strong and easy to disassemble and assemble, and the wires are firmly fixed without taking up space
 2. The assembly is simple, fast, firm, easy to open, and can be reused many times
- Suitable conditions: indoor or outdoor

产品使用方法

1. 擦干净需要粘贴的位置
2. 揭掉产品背面的 3M 胶抗蚀膜
3. 将产品胶面粘贴在选定的位置上
4. 固定线缆

How to use the product

1. Wipe the place where it needs to be pasted
2. Peel off the 3M adhesive resist film on the back of the product
3. Paste the product glue surface on the selected position
4. Fix the cable

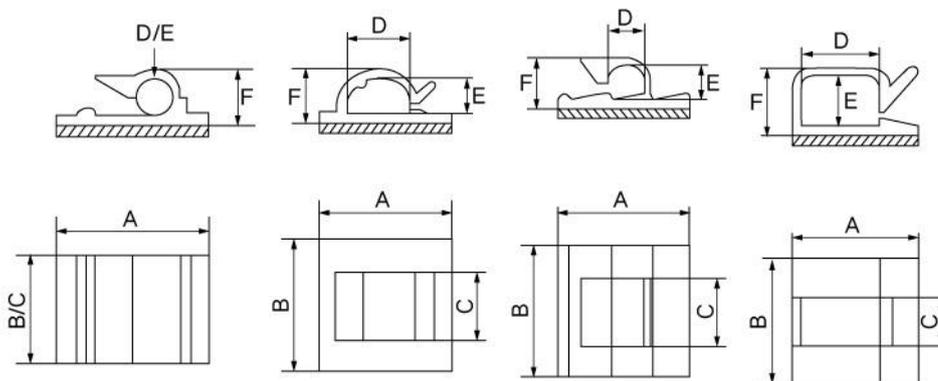

型号规格 Item NO.	A	B	C	D	E	F	包装 packing
WCL-1	20.7	13.1	13.1	9.1	9.1	7.9	100PCS
WCL-2	24.5	25.5	12.5	11	8.3	8.7	
WCL-3	15.6	15	9	4.5	4.5	6.5	
WCL-4	16	14.4	7.1	8.2	5.2	8.8	
WCL-5	16	16.8	7.6	10.2	6.7	9.5	
WCL-6	19	19	9.7	12.5	8.1	11	
WCL-7	19	19	9	13.6	8.2	11.3	



技术信息

- 产品名称：插削式扎带固定座
- 产品材质：尼龙 PA66
- 温度范围：-40°C ~ +150°C
- 产品颜色：白色
- 防火等级：UL94V-2
- 其他特征：抗紫外线、绝缘、耐磨

Technical Information

- Product name: Slotted cable tie holder
- Product material: Nylon PA66
- Temperature range: -40°C ~ +150°C
- Product color: white
- Fire rating: UL94V-2
- Other features: UV resistance, insulation, abrasion resistance

产品特性

1. 电线固定牢固，不占空间
 2. 装配简单、快速、牢固、抗冻耐用、绝缘质轻、可多次重复使用
 3. 帮助理线，收纳电线电缆
 4. 经得起环境考验，耐高温、耐候性中的佼佼者
- 适合条件：可配合尼龙扎带一起使用，更加容易拆卸安装

Product features


1. The wire is firmly fixed and does not take up space
 2. The assembly is simple, fast, firm, durable against frost, light insulated, and can be reused many times
 3. Help to manage wires and store wires and cables
 4. Stand the test of the environment, the best in high temperature resistance and weather resistance
- Suitable conditions: It can be used with nylon cable ties, which is easier to disassemble and install

产品使用方法

1. 将使用基板钻孔
2. 将固定座固定基板孔
3. 扎带穿入插削孔结扎线缆收缩

How to use the product

1. The substrate will be drilled using
2. Fix the holder to the substrate hole
3. The cable tie is inserted into the slotting hole to ligate the cable to shrink

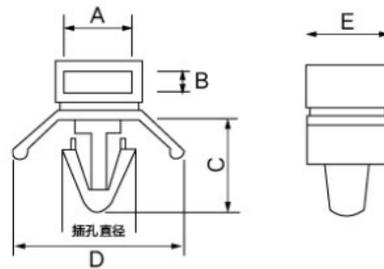

型号规格 Item NO.	A	B	C	D	E	插销直径 Pin diameter	PC 面板大厚度 Large thickness of PC panel
CCM-4	3.7	2	8.5	15	16.3	4.5-5.5	1.5
CCM-5	5.8	1.9	9.0	18.3	9.6	5.2-6.3	3.6
CCM-6	6.2	1.6	10.5	15.5	7.2	5.5-6.5	3.2
CCM-8	8.2	2.9	11	20.5	9.5	5.3-6.7	3.0



技术信息

- 产品名称: 尼龙铆钉
- 产品材质: 尼龙 PA66
- 温度范围: -30℃ ~ -130℃
- 产品颜色: 白色、黑色
- 防火等级: UL94V-2
- 产品标准: 国标

Technical Information



- Product name: nylon rivet
- Product material: nylon PA66
- Temperature range: -30 °C ~ -130 °C
- Product color: white, black
- Fire level: UL94V-2
- Product standard: national standard

产品特性

1. 耐酸、耐腐蚀、耐磨
2. 绝缘性良好, 不易老化、承受力强、表面平整光滑无毛刺
3. 优良的机械强度、质量良轻、噪音低等

Product features

1. acid resistance, corrosion resistance, wear resistance
2. Good insulation, not easy to aging, strong tolerance, smooth and smooth surface
3. Good mechanical strength, light quality, low noise, etc.

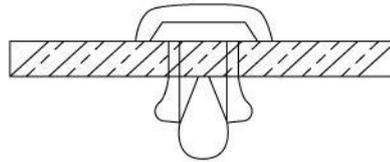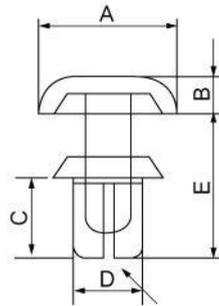

规格 Item No.	适用孔径 Hole Dia	通用厚板 P Anne Thick	A	B	C	D	E	拔拉力
R2032	2.1	1.3-2.0	4.2	1.2	3.2	2.0	3.8	3kg
R2040		2.1-2.8			4.0			
R2048		2.9-3.6			4.8			
R2056		3.7-4.4			5.6			
R2064		4.5-5.2			6.4			
R2632	2.7	1.0-2.0	5.0	1.4	3.2	2.6	4.6	5kg
R2642		2.1-3.0			4.2			
R2648		2.7-3.6			4.8			
R2655		3.4-4.3			5.5			
R2664		4.4-5.2			6.4			
R2672		5.1-6.0			7.2			

规格 Item No.	适用孔径 Hole Dia	适用厚板 PAnne Thick	A	B	C	D	E	拔拉力
R3035	3.1	1.0-2.0	6.4	1.6	3.5	3.0	5.1	8kg
R3045		2.1-3.0			4.5		6.1	
R3055		3.0-4.0			5.5		7.1	
R3065		4.0-5.0			6.5		9.1	
R3075		5.0-6.0			7.5		11.1	
R3080		5.5-6.5			8.0			
R3090		6.5-7.5			9.0			
R3100		7.5-8.5			10.0			
R3535	3.6	1.2-2.1	6.4	1.6	3.5	3.5	5.1	12kg
R3545		2.2-3.1			4.5		6.1	
R3550		2.7-3.6			5.0		7.1	
R3555		3.2-4.1			5.5		9.1	
R3560		3.7-4.6			6.0			
R3570		4.7-5.5			7.0			
R3580		5.7-6.6			8.0			
R4040	4.1	1.5-2.5	8.1	1.8	4.0	4.0	6.1	20kg
R4050		2.5-3.5			5.0		7.0	
R4060		3.5-4.5			6.0		9.0	
R4070		4.5-5.5			7.0		11.0	
R4080		5.5-6.5			8.0		14.1	
R4090		6.5-7.5			9.0			
R4100		7.5-8.5			10.0			
R4020		9.0-10.5			12.0			
R5045	5.1	1.5-2.5	9.0	2.2	4.5	5.0	6.5	25kg
R5055		2.5-3.5			5.5		8.5	
R5065		3.5-4.5			6.5		10.1	
R5075		4.5-5.5			7.5		12.0	
R5085		5.5-6.5			8.5			
R5095		6.5-7.5			9.5			
R5105		7.5-8.5			10.5			
R6060	6.1	2.5-4.5	6.1	2.5	6.0	6.0	9.0	30kg
R6080		4.0-5.5		3.0			8.0	



技术信息

- 产品名称：尼龙网管
- 产品材质：PA 尼龙
- 温度范围：-40℃ ~+150℃
- 产品颜色：黑色
- 熔点：240℃ +10℃
- 阻燃等级：94-V1
- 用途：固定和保护收纳线路

Technical Information

- Product name: nylon network management
- Product material: PA nylon
- Temperature range: -40 °C ~+150 °C
- Product color: black
- Following point: 240 °C +10 °C
- Flame retardant level: 94-v1
- Uses: fixed and protected storage lines

产品使用方法

1. 截取需要长的尼龙网管
2. 火烧尾部避免网管线被拉伸
3. 舒张网管套入需要收纳的电线当中
4. 套好以后收紧网管即可

How to use the product

1. Terry the nylon network management that needs long
2. Burning the tail to avoid the network pipeline is stretched
3. The diastolic network pipe set into the wire that needs to be stored
4. After setting up, tighten the network tube

产品特性

1. 弹性强、包裹性超强、柔韧可塑、严丝合缝
2. 由环保型 PET 丝编织而成，独特的网状特征具有良好的通风性和瞬间散热性
3. 良好的柔韧性、弹性和耐磨性，并能在较大的温度范围内保持柔软
4. 1.5 倍的延展性，三线编织，细密细丝编织，良好的灵活性以及更能方便的线程处理

Product features

1. Strong elasticity, super -wrapped, flexible and plastic, strict silk joint
2. Weaving from environmentally friendly PET silk, the unique mesh characteristics have good ventilation and instant heat dissipation
3. Good flexibility, elasticity and abrasion resistance, and can maintain softness within a large temperature range
4. 1.5 times the ductility, three -line weaving, fine filament woven, good flexibility and more convenient thread processing

型号规格 Item NO.	长度 length	适用套线直径 Applicable sleeve diameter	型号规格 Item NO.	长度 length	适用套线直径 Applicable sleeve diameter
直径 2mm	100 米 / 卷	2-5MM	直径 28mm	100 米 / 卷	19-45MM
直径 3mm	100 米 / 卷	2-5MM	直径 30mm	100 米 / 卷	20-50MM
直径 4mm	100 米 / 卷	4-8MM	直径 32mm	100 米 / 卷	26-52MM
直径 6mm	100 米 / 卷	4-10MM	直径 35mm	100 米 / 卷	26-52MM
直径 8mm	100 米 / 卷	5-16MM	直径 40mm	100 米 / 卷	30-60MM
直径 10mm	100 米 / 卷	7-19MM	直径 50mm	50 米 / 卷	40-80MM
直径 12mm	100 米 / 卷	8-24MM	直径 60mm	50 米 / 卷	45-95MM
直径 14mm	100 米 / 卷	12-25MM	直径 70mm	50 米 / 卷	60-120MM
直径 16mm	100 米 / 卷	12-25MM	直径 80mm	50 米 / 卷	70-140MM
直径 18mm	100 米 / 卷	15-28MM	直径 100mm	50 米 / 卷	90-150MM
直径 20mm	100 米 / 卷	15-28MM	直径 120mm	50 米 / 卷	105-180MM
直径 25mm	100 米 / 卷	18-35MM	直径 150mm	50 米 / 卷	140-260MM



技术信息

- 产品名称：绝缘热缩管
- 产品材质：全新料 PP 聚丙烯
- 温度范围：110°C
- 产品颜色：白色、黑色、黄色、透明色、红色、绿色、蓝色
- 收缩比例：2:1

Technical Information

- Product name: Insulation heat shrinkage tube
- Product material: new material PP polypropylene
- Temperature range: 110°C
- Product color: white, black, yellow, transparent, red, green, blue
- Contraction ratio: 2:1

产品特性

1. 管壁厚，耐高温，抗老化强，使用寿命长，不易坏
2. 两倍热缩，可自由的剪裁
3. 防漏电保护，预防触电，安装简单，用不完的部分可剪去
4. 可搭配热风枪进行收缩

Product features

1. Tube wall thickness, high temperature resistance, anti-aging strong, long service life, not easy to break
2. Twice the heat shrinking, free tailoring
3. Protection of leakage electricity, preventing electric shock, simple installation, can be cut off for incomplete parts
4. Cable with hot air guns for contraction

型号 Model (mm)	规格 Specification (m)	实际尺寸 Actual size (mm)	扁宽度 Flat width (mm)	壁厚 Wall thickness (mm)	整卷重量 Whole roll weight (KG)
φ1.0	200	1.5±0.2	2.7	0.20±0.05	0.39
φ1.5	200	2.0±0.2	3.4	0.20±0.05	0.47
φ2.0	200	2.5±0.2	4.27	0.20±0.05	0.71
φ2.5	200	3.0±0.2	4.69	0.20±0.05	0.87
φ3.0	200	3.5±0.2	5.74	0.20±0.05	0.92
φ4.0	200	4.7±0.2	7	0.25±0.05	1.24
φ5.0	100	5.5±0.2	8.55	0.28±0.05	0.88
φ6.0	100	6.5±0.2	10.14	0.28±0.05	0.98
φ8.0	100	8.5±0.2	13.68	0.30±0.08	1.33
φ10	100	10.5±0.2	17.06	0.30±0.08	1.4
φ12	100	12.5±0.2	20.36	0.30±0.08	1.59
φ14	100	14.5±0.2	23.19	0.35±0.10	2.14
φ16	100	16.5±0.2	25.96	0.35±0.10	2.3
φ18	100	19.0±0.2	30.1	0.35±0.10	2.61
φ20	100	22.0±0.2	33.83	0.40±0.10	3.57
φ22	100	24.0±0.2	37.41	0.40±0.12	3.62
φ25	25	26.0±0.2	40.8	0.45±0.12	1.39
φ30	25	31.5±0.2	49.55	0.35±0.05	1.35
φ35	25	36.5±0.2	56.85	0.35±0.15	1.32
φ40	25	41.5±0.2	65.95	0.35±0.15	1.86
φ50	25	≥ 50	80.08	0.35±0.15	1.97
φ60	25	≥ 60	97.5	0.37±0.20	2.58
φ70	25	≥ 70	113.26	0.37±0.20	2.69
φ80	25	≥ 80	130.7	0.37±0.20	3.29
φ90	25	≥ 90	147.26	0.37±0.20	3.98
φ100	25	≥ 100	162.1	0.37±0.20	4.29
φ120	25	≥ 120	194.64	0.55±0.30	5.93
φ150	25	≥ 150	243	0.55±0.30	8.7



技术信息

- 产品名称：PVC 包塑电镀锌铁扎丝
- 产品材质：PVC 塑料
- 产品颜色：黑 / 白 / 黄 / 红 / 蓝 / 绿色
- 用途：适用于网吧机房、办公室、种植园、花园等场景里需将电线固定在基板上之固定用

Technical Information


- Product name: PVC bag plastic plastic electroplating iron tie wire
- Product material: PVC Plastic
- Product color: black/white/yellow/red/blue/green
- Uses: It is suitable for the use of Internet cafes, offices, plantations, gardens and other scenarios to fix the wires on the substrate

产品特性


1. 牢固耐用、不易折断、扭转无破损、捆绑方便
2. 外壳采用高质量 PVC 塑料制成，柔韧性高、绝缘、阻燃
3. 捆扎牢固，多次扭转也不易断裂
4. 高韧性、高弹性、镀锌防锈

Product features

1. Firm durability, not easy to break, to reverse without damage, and convenient bundle
2. Made of high -quality PVC plastic, high flexibility, insulation, flame retardant
3. Binding firmly, it is not easy to break many times
4. High toughness, high elasticity, galvanizing rust -proof

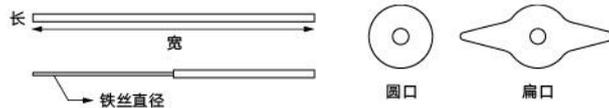

尺寸 size	截面 section		长度 (m)	颜色 colour
	圆型 Circular	扁型 Flat type		
0.45mm	√	√	90	红 / 黄 / 蓝 / 绿 / 白 / 黑
0.55mm	√	√	80	红 / 黄 / 蓝 / 绿 / 白 / 黑
0.75mm	√	√	55	红 / 黄 / 蓝 / 绿 / 白 / 黑
0.95mm	√	√	40	红 / 黄 / 蓝 / 绿 / 白 / 黑
1.2mm	√		25	红 / 黄 / 蓝 / 绿 / 白 / 黑
1.5mm	√		25	红 / 黄 / 蓝 / 绿 / 白 / 黑

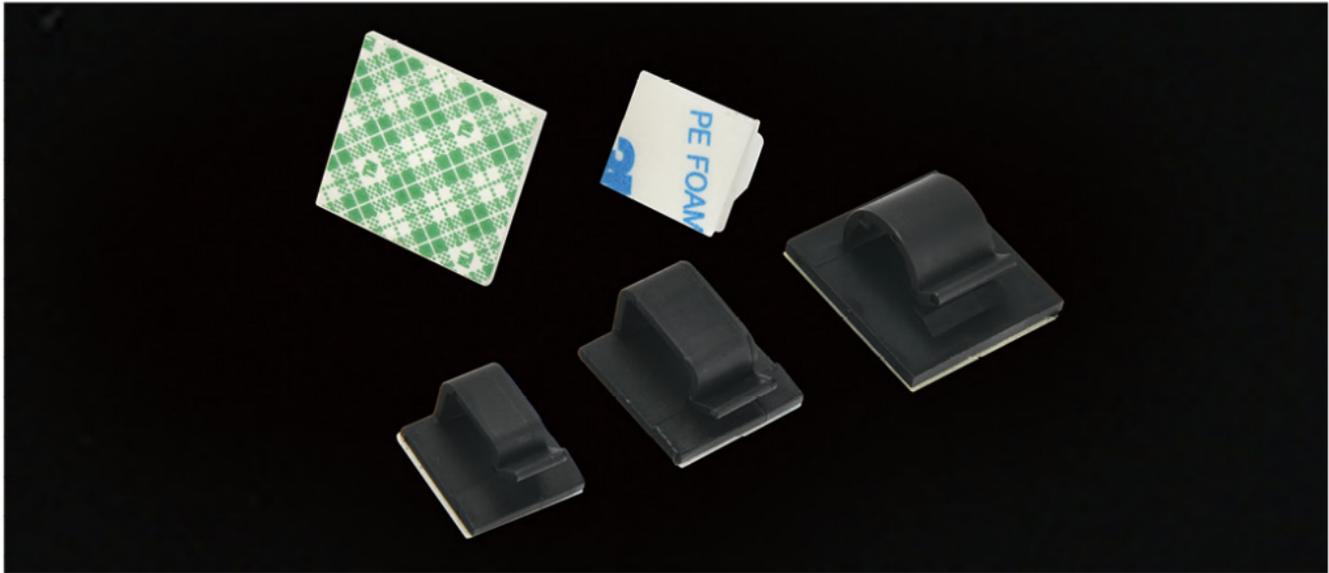


技术信息

- 产品材料: UL 认可之尼龙 66 防火等级 94V-2。背附进口双面海绵胶, 绝性能良好, 耐久性, 不易老化。
- 使用方法: 将定位片海绵胶撕开, 贴于机板固定, 在用扎带捆扎电线。
- 产品用途: 省时, 简便, 拱面板不可以钻孔时使用。

Technical Information

- Product material: UL approved nylon 66 fire rating 94V-2. With imported double-sided sponge gum, excellent performance, durability, not easy to aging.
- Usage: Rip the positioning piece of sponge glue, stick it to the machine board and fix it, then tie up the wire with the tie belt.
- Use: time saving, simple, arch panel can not be used when drilling.

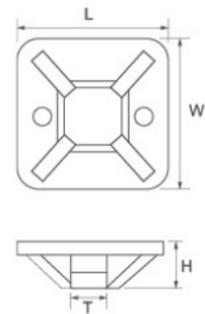

型号规格 Item NO.	L × W (mm)	H (mm)	T	螺丝孔 Screw Hole (mm)
20 × 20	18 × 18	6.1	5.00	2.9
25 × 25	23 × 23	7.5	6.20	3.5
30 × 30	28 × 28	8.7	6.40	4.5
40 × 40	38 × 38	6.4	10.80	5.2




产品概述

- 骡牙规格: PG 牙
- 产品材质: A.C.E 部分采用 UL 认可之尼龙 PA (防火等级 UL94V-2) 制成; (可定制 UL 认可的 V-0 防火等级尼龙原料); B.D 部分采用三元乙丙耐候橡胶制成。(可定制耐寒、耐高温橡胶; 耐高酸碱、耐化学与抗腐蚀橡胶)。
- 保护等级: IP68
- 工作温度: 静态 -40°C 至 100°C, 或瞬间可耐热至 120°C; 动态 -20°C 至 80°C, 或瞬间可耐热至 100°C。
- 产品特性: 特殊夹紧爪与夹紧圈之设计, 夹紧电缆范围大, 抗拉力特强, 可防水、防尘、抗盐、耐弱酸、酒精、油、油脂及一般溶剂。
- 颜色种类: 黑色、灰色, 其他颜色可定做。

Product Overview

- Mule teeth specification: PG teeth
- Material: Part A.C.E is made of UL approved nylon PA (fire rating UL94V-2). (Customizable UL approved V-0 fire-resistant nylon material); B. Part D is made of epDM weather-resistant rubber. (Can be customized cold and high temperature resistant rubber; High acid and alkali resistance, chemical resistance and corrosion resistance of rubber.
- Protection level: IP68
- Working temperature: static -40°C to 100°C, or instant heat resistance to 120°C; Dynamic -20°C to 80°C, or instant heat resistance to 100°C.
- Features: design of special clamping claw and clamping ring, wide range of clamping cable, excellent tensile strength, waterproof, dustproof, salt resistant, weak acid resistant, alcohol resistant, oil, grease and general solvent.
- Color: black, gray, other colors can be customized.

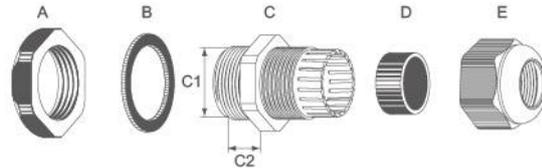

型号规格 Item NO.	适用电缆 Applicable to cable		螺纹外径 (C1) Thread diameter	螺纹长度 (C2) Thread length	扳手直径 Spanner diameter
	常规型	加厚型			
PG7	3~6.5	2~5	12.5	8	16
PG9	4~8	2~6	15.2	8	19
PG11	5~10	3~7	18.6	8	22
PG13.5	6~12	5~9	20.4	10	24
PG16	10~14	7~12	22.5	10	27
PG19	12~16	10~13	24	10	27
PG21	13~18	9~16	28.3	10	33
PG25	16~21	13~18	30	11	35
PG29	18~25	13~20	37	12	42
PG36	22~32	20~26	47	14	52
PG42	32~38	25~31	54	14	60
PG48	37~44	29~35	59.3	15	64
PG63	42~50	32~40	71	28	77
PG7L	3~6.5	2~5	15	8	16
PG9L	4~8	2~6	15	8	19
PG11L	5~10	3~7	15	8	22
PG13.5L	6~12	5~9	15	10	24
PG16L	10~14	7~12	15	10	27
PG19L	12~16	10~13	15	10	27
PG21L	13~18	9~16	15	10	33
PG29L	18~25	13~10	18	12	42
PG36L	22~32	20~26	18	14	52
PG42L	32~38	25~31	18	14	60
PG48L	37~44	39~35	18	15	64




产品概述

- 材质：PE（理线器 ABS）
- 结束方式：剪下所需长度，配合专用工具，一手压在上端，将工具向下拉，便可瞬间完成整线工作。
- 特点：本产品若使用变更是拆下容易，再重新使用原本的卷束带时其卷束力仍然不变。
- 用途：美观安全结束电线并没有保护电线免于割伤及绝缘。
- 特殊颜色，接受定制

Product Overview

- Material: PE (Liner ABS)
- End method: Cut the required length, with the special tool, press on the upper end with one hand and pull down the tool, then the whole line work can be completed in an instant.
- Ending force: if the product is easy to be removed after change of use, the winding force will remain unchanged when the original winding band is reused.
- Purpose: The beautiful and safe end wire does not protect the wire from cuts and insulation.
- Special color, accept custom

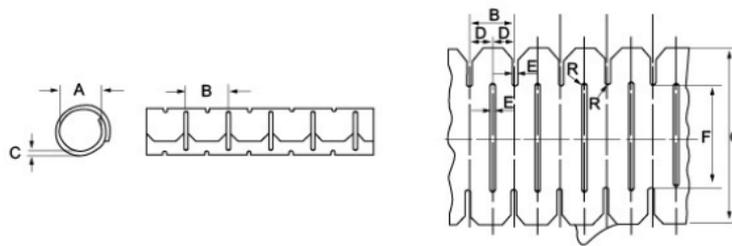

型号规格 Item NO.	A (mm)	C (mm)	G
RC-8MM	7	0.6	28.0
RC-12MM	10	0.7	37.0
RC-16MM	13	0.7	51.0
RC-22MM	18	0.75	70.0
RC-28MM	23	0.85	88.0
RC-32MM	27	1	100.0
RC-35MM	33	1.1	115.0
RC-42MM	38	1.3	131.0




产品概述

- 材质：PE 本色（另背黑色）
- 结束方式：剪下所需长度，以扎带固定一端，再将卷束依顺时针方向卷绕即可。
- 特点：本产品若使用变更是拆下容易，再重新使用原本的卷束带时其卷束力仍然不变。
- 用途：美观安全结束电线并没有保护电线免于割伤及绝缘。
- 特殊颜色，接受定制

Product Overview

- Material: PE natural color (black back)
- End method: cut the required length, fix one end with the tie, and then wind the coil bundle in a clock-wise direction.
- Features: If the product is easy to be removed after change of use, the winding force of the original tape will remain unchanged when it is re-used.
- Purpose: The beautiful and safe end wire does not protect the wire from cuts and insulation.
- Special color, accept custom



型号规格 Item NO.	d (mm)	D (mm)	W	Wrapping Range
SWB-04	1.5	4.0	4.0	1.5-10
SWB-06	4.0	6.0	7.0	4-50
SWB-08	6.0	8.0	10.8	6-60
SWB-10	8.0	10.0	11.4	7.5-60
SWB-12	9.0	12.0	14.0	9-65
SWB-15	12.0	15.0	15.0	12-75
SWB-19	15.0	19.0	18.0	15-100
SWB-24	20.0	24.0	19.5	20-130
SWB-30	26.0	30.0	43.0	26-150



产品概述

- 材质：采用 PP 料制成。
- 使用方式：先用保护带固定起点一端，然后按顺时针方向环绕紧，即可将电线束为一体，
- 用途：做为保护电线不受磨损及绝缘用，并可改进电线弯曲的美观。

Product Overview

- Material: made of PP material.
- Usage: first fix one end of the starting point with the protection belt and then tighten it around clockwise to integrate the wiring harness.
- Purpose: To protect the wire from abrasion and insulation, and to improve the appearance of wire bending.



型号规格 Item NO.	内径 D (mm) Inner dia	厚度 D1 (mm) Thickness	宽 W (mm) Width	束线范围 (mm) WRAPPING RANGE	包装 Packaging
RC-8	8	1.5	7	8-10	10M
RC-10	10		10	10-12	
RC-12	12		12	12-14	
RC-14	14		13	12-14	
RC-16	16	2	15.5	19-18	
RC-18	18		16	18-20	
RC-20	20	2.2	16	20-22	
RC-22	22		19.5	22-25	
RC-25	25		23	25-28	
RC-28	28		23	28-30	
RC-30	30	2.5	23	30-32	
RC-32	32		23.5	32-35	
RC-35	35		24	35-38	
RC-38	38	3	28	38-40	
RC-40	40		28	40-42	
RC-42	42	3.5	28	42-45	
RC-45	45		28	45-50	
RC-50	50		28	50-60	
RC-60	60	4	28	60-74	
RC-74	74		46.5	74-80	
RC-80	80	4.5	48.5	80-88	
RC-88	88		50	88-100	
RC-100	100		57	100-130	
RC-130	130		50	130-155	
RC-150	150	5	50	150-200	
RC-200	200		50	200-300	




技术信息

- 产品材质: 采用 UL 认可尼龙 66 料制成, 内部备有弹簧。
- 使用方法: 将电线尾部外皮剥去, 将所要接的电线同时插入扭紧即可。

Technical Information

- Material: made of UL approved nylon 66 with spring inside.
- Usage: peel off the skin at the end of the wire, insert and tighten the wire to be connected.



型号规格 Item NO.	高 H (mm) High	宽 W (mm) Width	内径 D (mm) Inner dia	适合电线 Suitable Wires	颜色 Color
RC-P71	15	8.5	6.5	MIN#20 × 1+ #22 × 1 MAX#16 × 2	灰、蓝、橙、黄、红
RC-P72	18	10	7.5	MAX#20 × 3 MAX#16 × 3	
RC-P73	20	11.5	9.5	MIN#20 × 3 MAX#16 × 3+ #18 × 1	
RC-P74	23.5	13.5	10.8	MIN#14 × 1+ #18 × 1 MIN#14 × 4+ #18 × 1	
RC-P75	23.5	15.5	12.7	MIN#14 × 2 MAX#10 × 2+ #12 × 2	




技术信息

- 产品材质: 采用 UL 认可尼龙 66 料制成, 内部备有弹簧。
- 使用方法: 将电线尾部外皮剥去, 将所要接的电线同时插入扭紧即可。
- 产品特点: 外形设有扭转翼, 使操作省力轻便, 易于将电线固定。

Technical Information

- Material: made of UL approved nylon 66 with spring inside.
- Usage: peel off the skin at the end of the wire, insert and tighten the wire to be connected.
- Features: the shape of the torsion wing, so that the operation of light, easy to fix the wire.



型号规格 Item NO.	高 H (mm) High	宽 W (mm) Width	内径 D (mm) Inner dia	适合电线 Suitable Wires	颜色 Color
RC-P1	22.0	19.0	12.5	MAX#18 × 2 MAX#12 × 3	黄
RC-P2	28.0	22.2	15.0	MAX#14 × 2 MAX#10 × 4	红




产品概述


- 产品材质: UL 认可之尼龙 66, 防火等级 94V-2;
- 使用方法: 将电线尾部外皮剥去再插入套管内, 用压线钳压紧即可。
- 产品特点: 外壳为尼龙注塑成型、内部铜管特长, 增加电线压接范围使其更易于导电, 并更能架住电线, 即使强烈振动亦不脱落。

Product Overview

- ▶ Material: NYLON 66 approved by UL, fire rating 94V-2;
- ▶ Usage: Peel off the outer skin at the end of the wire and insert it into the casing tube, then press it down with the wire clamp.
- ▶ Product features: the outer shell is made of nylon injection molding, the inner copper tube is extra long, increase the crimping range of the wire to make it easier to conduct electricity, and more able to hold the wire, even if the strong vibration will not fall off.

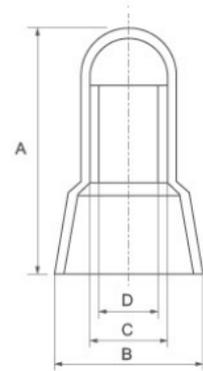

型号规格 Item NO.	高 A (mm)	W (mm)	B (mm)	C (mm)	铜管内径 D (mm)	适用电线范围 mm ²	Suitable Wires Awg
RC-Φ3	18	9	9	3.6	2.8	1.25	22-16
RC-Φ4	21	9.5	9.5	3.9	3	2	16-14
RC-Φ5	22.5	10.5	10.5	4.8	4	5.5	12-10
RC-Φ6	24	12	12	5.6	4.8	8	8
RC-Φ7	25.5	13	13	6.5	5.5	10	8-6
RC-Φ8	25.5	14	14	7.5	6	13	6
RC-Φ10	29.5	15.5	15.5	9.3	7.8	16	4
CE-1X	17.2	7.2	7.2	2.8	2.45	1.25	22-16
CE-2X	18.9	9.4	9.4	3.7	3.1	2	16-14
CE-5X	22.5	11.7	11.7	5.4	4.5	5.5	12-10
CE-8X	27.8	14.1	14.1	7	5.5	16	4



Self-locking nylon cable tie



Retractable nylon cable tie



Stainless steel cable tie self-locking type



Stainless steel cable tie locking type



Stainless steel cable tie screw buckle type



Stainless steel cable ties in stepped configuration



Plastic-coated stainless steel cable ties with ball-type self-locking mechanism




Magic Cable Tie



Magic Cable Tie



Stainless steel cable tie reel



Fine-toothed groove



Expansion tube




Impact anchor bolt



Round steel nail wire clip



Square steel nail wire clip



Adjustable adhesive-type clamp



Cable tie mounting base



R-type clamp



Self-adhesive positioning sheet



Self-adhesive positioning sheet



Cable gland PG thread type



Wire-wrapped tube



Wire winding tube



Spiral tube



Helical crimp cap



Double pterygote alatus spiral pressure cap



Safety-type wire connector cap